



LITA GARDEN

NINGBO LITA GARDEN TECHNOLOGY CO.,LTD

Add: NO.101,2nd Gongmao Rd,Jishigang Town, Ningbo China

Tel: 0086-574-87965261

Fax:0086-574-87965289

Web: www.litagarden.com

Contact person: Ted Chen

Email: sales@litagarden.com

Wechat /Whatsapp: 0086-18094518270



BRUSH CUTTER

LITA GARDEN

PRO Brushcutter

Auto stop switch

If the machine is turned off, the stop button returns to start position automatically

Anti-vibration system

The anti-vibration tube reduce vibration .the user will be more comfortable


LCG145/LCG151

shaft

Strong 28x2mm shaft and 8x9mm drive shaft

Bigger protector

It can offer 165mm cut width . Work efficiency increse so much

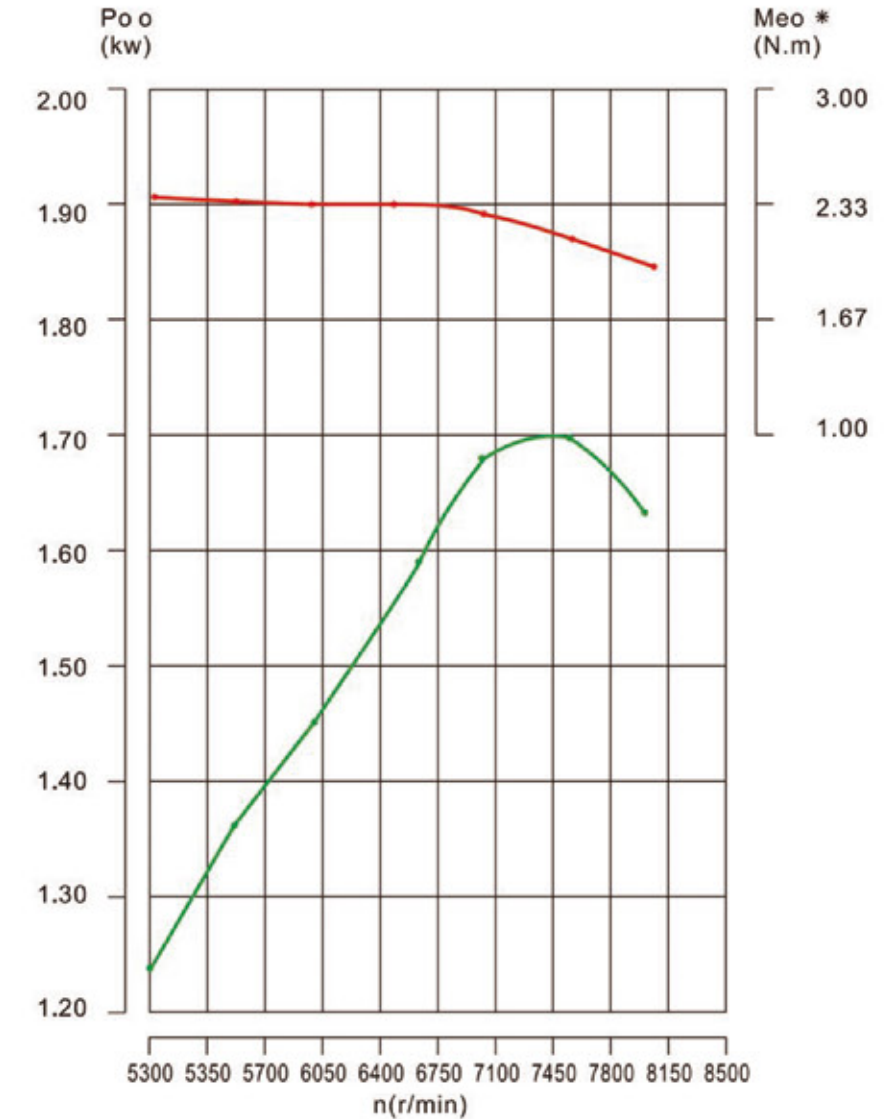

SPECIFICATIONS

| | LCG145 | LCG151 |
|-----------------------|-----------------|----------------|
| Structure | OHC | OHC |
| Inner diameter/Stroke | 42/32mm | 45/32mm |
| Displacement | 44.3cc | 50.9cc |
| Max power | 1.52kw/7500rpm | 1.70kw/7000rpm |
| Max Torque | 2.25N.m/6000rpm | 2.4N.m/5000rpm |
| Fuel tank | 1.29L | 1.29L |
| Weight | 5.1kg | 5.2kg |
| Fuel consumption | 480g/kw.h | 450g/kw.h |
| HC+NO(EPA&CARB≤72) | 15.6 | 17.6 |
| CO(EPA&CARB≤536) | 388 | 408 |
| Use micture fuel | 40:1 | 40:1 |

PRO
Brushcutter



LBG151/145

PRO
Brushcutter

LCG430GX/520GX



LCG430GX-H/520GX-H



Professional brushcutter and Clearing saws
Comfortable, durable and powerful professional tools

| SPECIFICATIONS | LBG145 | LBG151 |
|-----------------------|-----------------|----------------|
| Structure | OHC | OHC |
| Inner diameter/Stroke | 42/32mm | 45/32mm |
| Displacement | 44.3cc | 50.9cc |
| Max power | 1.52kw/7500rpm | 1.70kw/7000rpm |
| Max Torque | 2.25N.m/6000rpm | 2.4N.m/5000rpm |
| Fuel tank | 1.29L | 1.29L |
| Weight | 5.1kg | 5.2kg |
| Fuel consumption | 480g/kw.h | 450g/kw.h |
| HC+NO(EPA&CARB≤72) | 15.6 | 17.6 |
| CO(EPA&CARB≤536) | 388 | 408 |
| Mixed fuel ratio | 40:1 | 40:1 |

| TECHNICAL SPECIFICATIONS | LCG430GX | LCG520GX |
|--------------------------|-------------------|-------------------|
| Displacement | 43cc | 52cc |
| Mating Power | 1E40F-5GX | 1E44F-5GX |
| Power | 1.25/6500kw/r/min | 1.46/6500kw/r/min |
| Carburetor type | Diaphragm | Diaphragm |
| Mixed Fuel Ratio | 40:1 | 25:1 |
| Work rod diameter | 26/28mm | 26/28mm |
| Fuel tank | 1.2L | 1.2L |
| Weight | 10.3kg | 10.3kg |



PRO
Brushcutter



4 STROKE
Engine

LCG350A-GX

LBG350A-GX



Excellent torque for demanding jobs 38cc 4-stroke engine New deflector design for increased operator visibility Excellent balance and feel Ergonomically designed and Easy to start with air purge and Smart Start.

| SPECIFICATIONS | LCG330B | LCG430B | LCG520B | LBG330B | LBG430B | LBG520B |
|-------------------|-----------------|-------------------|-------------------|-----------------|-------------------|-------------------|
| Displacement | 33cc | 43cc | 52cc | 33cc | 43cc | 52cc |
| Mating Power | 1E36F-2B | 1E40F-5B | 1E44F-5B | 1E36F-2B | 1E40F-5B | 1E44F-5B |
| Power | 0.9kw/8000r/min | 1.25/6500kw/r/min | 1.46/6500kw/r/min | 0.9kw/8000r/min | 1.25/6500kw/r/min | 1.46/6500kw/r/min |
| Carburetor type | Diaphragm | Diaphragm | Diaphragm | Diaphragm | Diaphragm | Diaphragm |
| Mixed Fuel Ratio | 40:1 | 40:1 | 40:1 | 40:1 | 40:1 | 25:1 |
| Work rod diameter | 26/28mm | 26/28mm | 26/28mm | 26mm | 28mm | 28mm |
| Weight | 8.5kg | 8.5kg | 8.5kg | 10.62kg | 10.62kg | 10.62kg |

| TECHNICAL SPECIFICATIONS | LCG350A-GX | LBG350A-GX |
|--------------------------|------------------|------------------|
| Displacement | 38cc | 38cc |
| Mating Power | 140F-GX | 140F-GX |
| Power | 0.9/6500kw/r/min | 0.9/6500kw/r/min |
| Carburetor type | Diaphragm | Diaphragm |
| Mixed Fuel Ratio | Separate | Separate |
| Work rod diameter | 26/28mm | 26/28mm |
| Weight | 8.3kg | 10kg |